




MAPEI Ultralite Mortar™

Premium, Lightweight Mortar with Polymer for Large-and-Heavy Tile

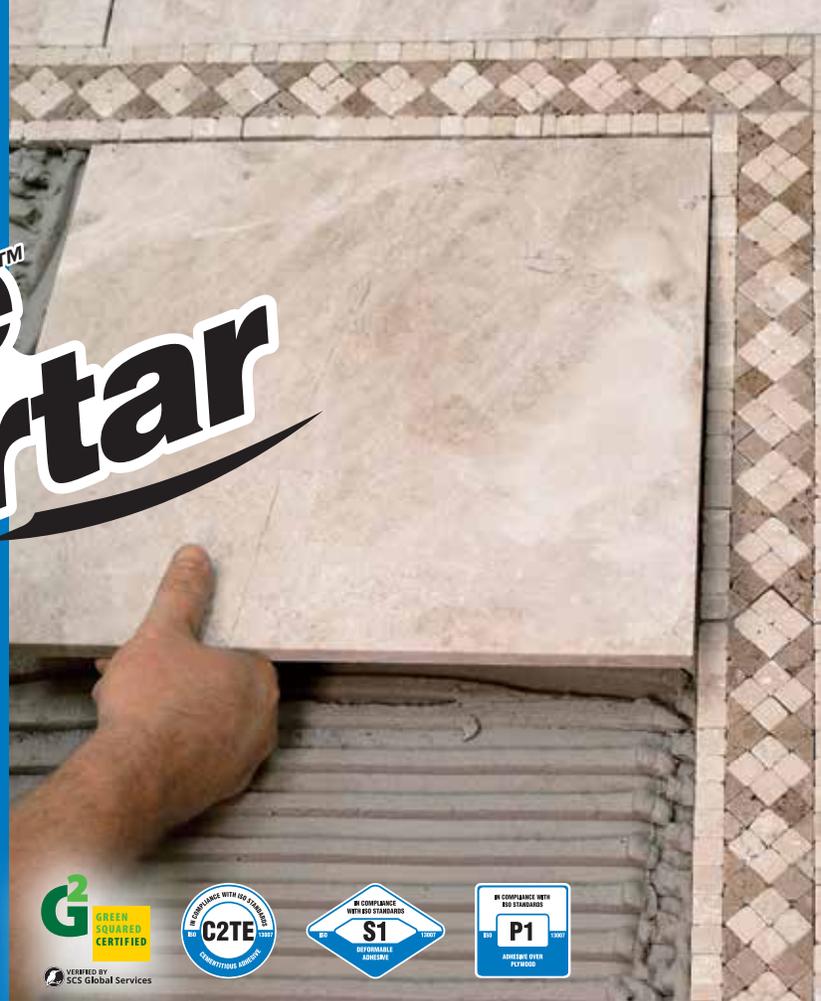

Universal Color Formula™



DESCRIPTION

MAPEI Ultralite Mortar is a premium-grade, lightweight, single-component thin-set mortar that can also be used for large-and-heavy tile (formerly known as “medium-bed”) and non-sag applications. This high-performance, polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application, and with BioBlock® technology for mold and mildew resistance. MAPEI Ultralite Mortar’s unique Ultralite Technology™ provides twice the coverage of a standard thin-set mortar per pound/kg and may contribute to LEED points with more than 20% recycled content.

FEATURES AND BENEFITS

- Polymer-enriched for high performance and deformability
- Non-sag formula for large-and-heavy tile and stone
- Nonslump for large-and-heavy tile and stone in floor applications
- A 25-lb. (11,3-kg) bag provides the same coverage as a 50-lb. (22,7-kg) bag of a standard polymer-modified mortar.
- Designed with Universal Color Formula™ for installations with light-colored stones and translucent marble
- Smooth and creamy consistency
- For thicker bond coats from 3/32" to 1/2" (2,5 to 12 mm)

INDUSTRY STANDARDS AND APPROVALS

- ISO 13007: Classification C2TES1P1
- ANSI: Exceeds ANSI A118.4TE, ANSI A118.11 and ANSI A118.15TE requirements
- SCS Green Squared Certified per ANSI A138.1

LEED v4 Points Contribution

LEED Points

Green Squared (ANSI A138.1 – 2011 v2) for Ceramic Tile, Glass Tile and Tile Installation Materials* 1 point

Environmental Product Declaration (EPD):

TCNA Industry Average for Mortars* 1/2 point

Health Product Declaration (HPD)* Up to 2 points

* Using this product may help contribute to LEED certification of projects in the categories shown above. Points are awarded based on contributions of all project materials.

Additional Green Certifications

- Living Building Challenge (LBC) Red List Free: This product has been verified per the most current Red List on the LBC’s Website.

WHERE TO USE

- Most interior/exterior residential installations on floors and walls
- Most interior/exterior commercial installations on floors and walls
- Installation of ceramic and porcelain tile, quarry tile, pavers, Saltillo tile, and most types of marble, granite and natural stone

LIMITATIONS

- Install only at temperatures between 40°F and 95°F (4°C and 35°C).
- Do not use for moisture-sensitive stone (green marble; some limestone and granites), agglomerate tiles, or resin-backed tiles. Instead, use suitable epoxy or urethane adhesives. See the respective Technical Data Sheets for more information.



- Do not use over dimensionally unstable substrates such as hardwood flooring, oriented strand board (OSB), substrates containing asbestos, or metal. See the “Suitable Substrates” section below.
- To use directly over gypsum-based patching or leveling substrates, apply a suitable primer/sealer before use. See the technical bulletin “Tiling over gypsum” in the Related Documents section of the Tile & Stone Installation Systems page on MAPEI’s Website.
- Installations of tile over nonporous surfaces, such as waterproofing membranes and existing tile, may require extended setting/curing times.
- Do not use for installations subject to water immersion, such as pools and spas.
- Not recommended for areas subject to severe freeze/thaw conditions. For the best performance, use a MAPEI mortar system with a liquid latex additive.

SUITABLE SUBSTRATES

- Concrete (cured for at least 28 days)
- Masonry cement block, brick, cement mortar beds, render coats and leveling coats
- Cement backer units (CBUs) – see manufacturer’s installation guidelines
- Gypsum wallboard and plaster – interior walls in dry areas only (priming may be required). See MAPEI’s “Surface preparation requirements” reference guide in the Related Documents section of the Tile & Stone Installation Systems page on MAPEI’s Website.
- APA Group 1 and CANPLY 0121 exterior-grade plywood (interior, residential and light-commercial floors and countertops in dry conditions only)
- Properly prepared vinyl composition tile (VCT), vinyl and cutback residue (interior only)
- Properly prepared existing ceramic and porcelain tile, quarry tile and pavers (interior only)
- MAPEI waterproofing, crack-isolation, sound-reduction and uncoupling membranes (limited to thin-set installations only when using weak stone)

Consult MAPEI’s Technical Services Department for installation recommendations regarding substrates and conditions not listed.

SURFACE PREPARATION

- All substrates should be structurally sound, stable, dry, clean and free of any substance or condition that may reduce or prevent proper adhesion.
- Substrates to receive thin porcelain tiles must be perfectly flat. When installing thin-body porcelain tile, consult the recommendations regarding surface preparation, trowel selection and mechanical edge-leveling systems in MAPEI’s reference guides for thin-body porcelain tile 3 to 6 mm thick for walls, and 4,5 to 6 mm thick for floors. These reference guides can be found in the Related Documents section of the Tile & Stone Installation Systems page on MAPEI’s Website.

- See the “Surface preparation requirements” reference guide in the Related Documents section of the Tile & Stone Installation Systems page on MAPEI’s Website.

MIXING

Before product use, take appropriate safety precautions. Refer to the Safety Data Sheet for details.

1. Pour clean, potable water into a clean mixing container
- 2a. For thin-set applications: Use about 5.5 U.S. qts. (5,20 L) of water. Refer to Step 3 for final water addition.
- 2b. For large-and-heavy-tile and non-sag wall applications: Use about 5 U.S. qts. (4,73 L) of water. Refer to Step 3 for final water addition.
3. Gradually add 25 lbs. (11,3 kg) of powder while slowly mixing for at least 1 minute. Adjust the consistency with water, adding up to 1 additional U.S. qt. (946 mL) as needed, without overwatering. Mix again for 2 minutes.
4. Use a low-speed mixing drill (at about 300 rpm), with an angled cross-blade mixer or auger mixer. Mix thoroughly until mixture becomes a smooth, homogenous, lump-free paste. Avoid prolonged mixing.
5. Let mixture stand (“slake”) for 5 to 10 minutes.
6. Remix.
7. If mixture becomes heavy or stiff, remix without adding more liquid.

PRODUCT APPLICATION

Read all installation instructions thoroughly before installation.

1. Choose a notched trowel (see “Approximate Coverage” chart) with sufficient depth to achieve greater than 80% mortar contact to both the tile and substrate for all interior applications, and greater than 95% for exterior installations, commercial floor and wet applications. It may be necessary to back-butter the tile to meet these requirements. (Refer to ANSI A108.5 specifications and TCNA handbook guidelines.)
2. With pressure, apply a coat by using the trowel’s flat side to key the mortar into the substrate.
3. Apply additional mortar, combing it in a single direction parallel to the tile’s shortest dimension, with the trowel’s notched side. If thin tile is being installed, it should be placed so that the troweled ridges on its back are oriented in the same parallel direction as the trowel ridges on the substrate.
4. Spread only as much mortar as can be tiled before the product skins over. Open time can vary with jobsite conditions.
5. Place the tiles firmly into the wet mortar. Push the tiles back and forth in a direction perpendicular to trowel lines, to collapse the mortar ridges and to help achieve maximum coverage. Ensure proper contact between the mortar, tile and substrate by periodically lifting a few tiles to check for acceptable coverage.
6. Remove excess mortar from the joint areas so that at least 2/3 of the tile depth is available for grouting (see ANSI A108.10 guidelines).

ISO 13007 Classification

| Classification Code | Classification Requirement | Test Characteristic |
|--------------------------------------|--|--------------------------------|
| C2 (cementitious, improved adhesive) | ≥ 145 psi (1 MPa) after standard aging, heat aging, water immersion and freeze/thaw cycles | Using porcelain tile |
| T (slip resistance) | ≤ 0.019" (0,5 mm) | Using porcelain tile |
| E (extended open time) | ≥ 72.5 psi (0,5 MPa) after 30 minutes | Using glazed ceramic wall tile |
| S1 (normal deformation of mortar) | ≥ 0.1" (2,5 mm) | — |
| P1 (normal adhesion to plywood) | ≥ 72.5 psi (0,5 MPa) | Using porcelain tile |

ANSI Specification*

| Test Method | Specification Standard | Test Results |
|---|------------------------------------|-----------------------------------|
| ANSI A118.11 – shear strength, quarry tile to plywood | > 150 psi (1,03 MPa) at 28 days | 150 to 250 psi (1,03 to 1,72 MPa) |
| ANSI A118.15E – extended open time | ≥ 72.5 psi (0,5 MPa) at 30 minutes | Pass |
| ANSI A118.15 – shear strength, impervious ceramic (porcelain) mosaics | > 400 psi (2,76 MPa) at 28 days | Pass |
| ANSI A118.15 – shear strength, glazed wall tile | > 450 psi (3,10 MPa) at 7 days | 450 to 650 psi (3,10 to 4,48 MPa) |
| ANSI A118.15 – shear strength, quarry tile to quarry tile | > 150 psi (1,03 MPa) at 28 days | 400 to 600 psi (2,76 to 4,14 MPa) |
| ANSI A118.15T – sag on vertical surfaces | ≤ 0.02" (0,5 mm) at 20 minutes | Pass |

* Anything that meets A118.15 by definition exceeds A118.4.

Shelf Life and Product Characteristics (before mixing)

| | |
|------------|---|
| Shelf life | 1 year when stored in original, unopened packaging at 73°F (23°C) |
| Colors | Universal color |

Application Properties at 73°F (23°C) and 50% relative humidity

| | |
|--|----------------|
| Open time** | 30 minutes |
| Pot life** | > 2 hours |
| Time before grouting (walls)** | 8 to 16 hours |
| Time before grouting (floors)** | 24 to 48 hours |
| VOCs (Rule #1168 of California's SCAQMD) | 0 g per L |

** Actual open time, pot life and time before grouting will vary based on jobsite conditions.

Packaging

| Size and Color |
|---|
| Bag: 25 lbs. (11,3 kg), universal color |

EXPANSION AND CONTROL JOINTS

- Provide for expansion and control joints as specified per TCNA Method EJ171 or TTMAC Specification Guide 09 30 00, Detail 301MJ. Do not cover expansion joints with mortar.

CLEANUP

- Clean tools and tile while the mortar is fresh, using only water.

PROTECTION

- Do not disturb the installation, allow light traffic or grout any tiles for at least 24 to 48 hours.
- Protect the installation from general traffic for at least 72 hours, and from heavy traffic for at least 7 days.
- Protect the installation from rain for 72 hours, and from freezing for 21 days.

Note: When working in cold temperatures, protect tilework for an extended time for this dry-set mortar to cure before grouting and/or allowing traffic.

MAPEI
Ultralite[™]
Mortar

MAPEI Ultralite Mortar



Approximate Coverage* per 25 lbs. (11,3 kg)

| Typical Trowel | Coverage |
|---|---|
| For thin-set applications | |
| 1/4" x 1/4" x 1/4" (6 x 6 x 6 mm), square-notch | 75 to 90 sq. ft. (6,97 to 8,36 m ²) |
| 1/4" x 3/8" x 1/4" (6 x 10 x 6 mm), square-notch | 55 to 65 sq. ft. (5,11 to 6,04 m ²) |
| For large-and-heavy-tile and non-sag wall applications | |
| 1/4" x 1/4" x 1/4" (6 x 6 x 6 mm), square-notch | 75 to 90 sq. ft. (6,97 to 8,36 m ²) |
| 1/4" x 3/8" x 1/4" (6 x 10 x 6 mm), square-notch | 55 to 65 sq. ft. (5,11 to 6,04 m ²) |
| 1/2" x 1/2" x 1/2" (12 x 12 x 12 mm), square-notch | 38 to 45 sq. ft. (3,53 to 4,18 m ²) |
| 3/4" x 9/16" x 3/8" (19 x 14 x 10 mm), U-notch | 25 to 30 sq. ft. (2,32 to 2,79 m ²) |

* Trowel dimensions are width/depth/space. Actual coverage will vary according to substrate profile and tile type.

RELATED DOCUMENTS

Reference Guide: "Surface preparation requirements" for tile and stone installation systems*

Technical Bulletin: "Tiling over gypsum"*

* At www.mapei.com

Refer to the SDS for specific data related to health and safety as well as product handling.

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in effect at the time of the MAPEI product installation. For the most up-to-date TDS and warranty information, please visit our website at

www.mapei.com. **ANY ALTERATIONS TO THE WORDING OR REQUIREMENTS CONTAINED IN OR DERIVED FROM THIS TDS SHALL VOID ALL RELATED MAPEI WARRANTIES.**

Before using, the user must determine the suitability of our products for the intended use,

and the user alone assumes all risks and liability. **ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN FIFTEEN (15) DAYS FROM DATE IT WAS, OR REASONABLY SHOULD HAVE BEEN, DISCOVERED.**

We proudly support the following industry organizations:



MAPEI Headquarters of North America

1144 East Newport Center Drive
Deerfield Beach, Florida 33442
1-888-US-MAPEI (1-888-876-2734) /
(954) 246-8888

Technical Services

1-800-992-6273 (U.S. and Puerto Rico)
1-800-361-9309 (Canada)

Customer Service

1-800-42-MAPEI (1-800-426-2734)

Services in Mexico

0-1-800-MX-MAPEI (0-1-800-696-2734)

Edition Date: March 13, 2018

PR: 4777 MKT: 18-1235

For the most current **BEST-BACKED™** product data and warranty information, visit www.mapei.com.

All Rights Reserved. Printed in the USA. © 2018 MAPEI Corporation.